



LITEMAX DLF/DLH2126

Sunlight Readable 21.5" LED B/L LCD

User Manual

(1st Edition 2013/7/5)

All information is subject to change without notice.

Approved by	Checked by	Prepared by

LITEMAX Electronics Inc.

8F, No.137, Lane 235, Bau-chiau Rd.,
Shin-dian Dist., New Taipei City, Taiwan R.O.C.
Tel : 886-2-8919-1858
Fax: 886-2-8919-1300
Homepage: <http://www.litemax.com>

RECORD OF REVISION

Version and Date	Page	Old Description	New Description	Remark
Jul,5,2013	all		Initial Release	

Contents

RECORD OF REVISION	2
Contents	3
1.0 GENERAL DESCRIPTION	4
1.1 FEATURES	4
1.2 GENERAL SPECIFICATIONS.....	4
1.3 ABSOLUTE MAXIMUM RATINGS	5
2.0 Electrical characteristics	6
3.0 SIGNAL Characteristic	9
4.0 TIMING Characteristics	12
5.0 CONNECTOR and PIN ASSIGNMENT	14
6.0 OPTICAL SPECIFICATION	15
7.0 LED DRIVING BOARD SPECIFICATIONS	17
9.0 AD2662GDVAR SPECIFICATIONS(DLH2126 only)	20
9.1 General Description	20
9.2 Outline Dimensions	21
9.3 AD2662 Board Pin Define	24
J3: Panel connector	24
CN3: DVI-D INPUT Connector	24
CN5: DVI-D Connector (16pin 2.0mm)	25
CN2: Analog RGB Input connector (D-SUB 15Pin)	25
CN4: Analog RGB Input connector (13pin connector)	25
JS1: Power DIN(12V).....	25
JS1: Power Jack (12V).....	25
J1: Power connector (12V) (6PIN 2.0mm)	26
J8: Power connector (5V/12v)(4PIN 2.0mm)	26
J2: Inverter Connector(8PIN 2.0mm).....	26
J7, J9: FAN (2PIN 2.0mm).....	26
J6: Key Pad (9PIN 2.0mm)	26
J10: Speaker Connector (4PIN 2.0mm)	26
J11 Extern Funtion Connector (11P X 2PIN 2.0mm)	27
J5: Ambient (3PIN 2.0mm)	27
J4: VR connector (3PIN 2.0mm)	27
J12: IR Connector(3PIN 2.0mm).....	27
JP1: PANEL VCC (3PIN 2.54mm).....	27
9.4 I/O BOARD Pin Define	28
9.5 IR Receive Board Pin Define.....	29
9.6 DC Characteristics.	29
9.7 OSD menu	30
10.0 MECHANICAL DRAWING	35
11.0 PRECAUTIONS	37

1.0 GENERAL DESCRIPTION

DLF/DLH2126 is 21.5" wide color TFT-LCD module as active switching devices with 1,200nits LED backlight powered by Durapixel™ technology. This module has a 21.5 inch diagonally measured active area with Full HD resolutions (1920 horizontal by 1080 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 16.7M colors.

1.1 FEATURES

- Sunlight Readable
- LED Backlight
- Wide View Angle
- High Shock & Vibration Resistance
- FHD(1920x1080)
- Wide Dimming
- Life Expectancy

1.2 GENERAL SPECIFICATIONS

Model No.	DLF2126	DLH2126
Description	21.5" Wide TFT LCD, LED Backlight 1200 nits, FHD	
Display Area (mm)	476.64 (H) x 268.11(V)	
Brightness	1,200 cd/m ²	
Resolution	1920 x 1080 (FHD)	
Contrast Ratio	3000 : 1	
Pixel Pitch (mm)	0.24825(H) x 0.24825(V)	
Viewing Angle	178°(H), 178°(V)	
Display Colors	16.7M colors	
Response Time (Typical)	25 ms	
Sync	LVDS	
Power Consumption	48W	
Dimensions (mm)	497.6x292.1x10.9 mm	
Weight (Net)	1.8 Kg	

1.3 ABSOLUTE MAXIMUM RATINGS

Absolute maximum ratings of the module are listed as follows:

TFT LCD Module

Item	Symbol	Min	Max	Unit	Conditions
Logic/LCD Drive	VDD	-0.3	TBD	[Volt]	Note 1, 2

Absolute Ratings of Environment

Item	Symbol	Min.	Max.	Unit	Conditions
Operating Temperature	TOP	0	+50	[°C]	Note 3
Glass Surface Temperature (Operation)	TGS	0	+65	[°C]	Note3 Note4
Operation Humidity	HOP	5	90	[%RH]	Note 3
Storage Temperature	TST	-20	+60	[°C]	
Storage Humidity	HST	5	90	[%RH]	


Note 1: With in Ta (25 °C)

Note 2: Permanent damage to the device may occur if exceeding maximum values

Note 3: Temperature and relative humidity range are shown as the below figure.

1. 90% RH Max (Ta ≤ 39°C)
2. Max wet-bulb temperature at 39°C or less. (Ta ≤ 39°C)
3. No condensation

Note 4: Function Judged only

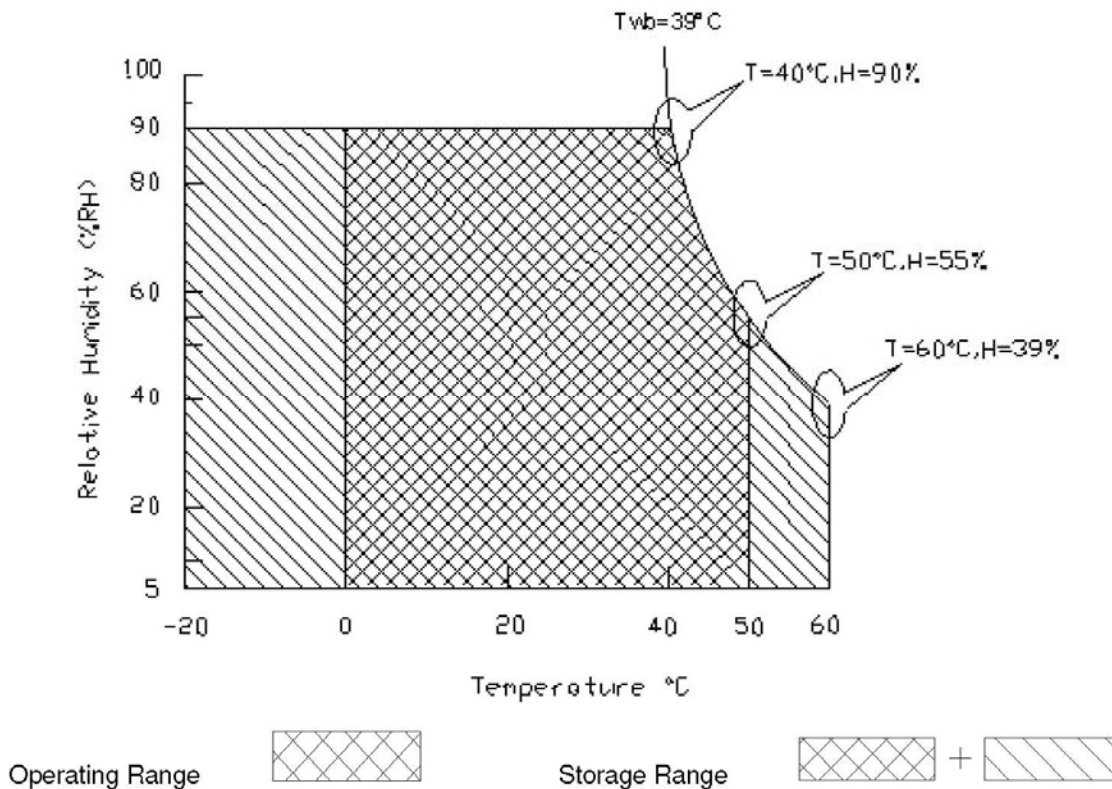

2.0 Electrical characteristics


TFT LCD Module Power Specification

Input power specifications are listed as follows:

Symbol	Description	Min	Typ.	Max	Unit	Conditions
VDD	Logic/LCD Drive Voltage	4.5	5.0	5.5	[Volt]	+/-10%
IDD1	Input Current	-	0.69	0.83	[A]	VDD= 5.0V, All White Pattern at 60 Hz
		-	0.8	0.96	[A]	VDD= 5.0V, All White Pattern at 75 Hz
PDD1	VDD Power	-	3.45	4.15	[Watt]	VDD= 5.0V, All White Pattern at 60 Hz
		-	4	4.8	[Watt]	VDD= 5.0V, All White Pattern at 75 Hz
IRush	Inrush Current	-	-	3	[A]	Note 1
VDDrp	Allowable Logic/LCD Drive Ripple Voltage	-	-	500	[mV] p-p	VDD= 5.0V, All White Pattern at 75 Hz

Note 1: Measurement Conditions:

The duration of rising time of power input is 470 us.

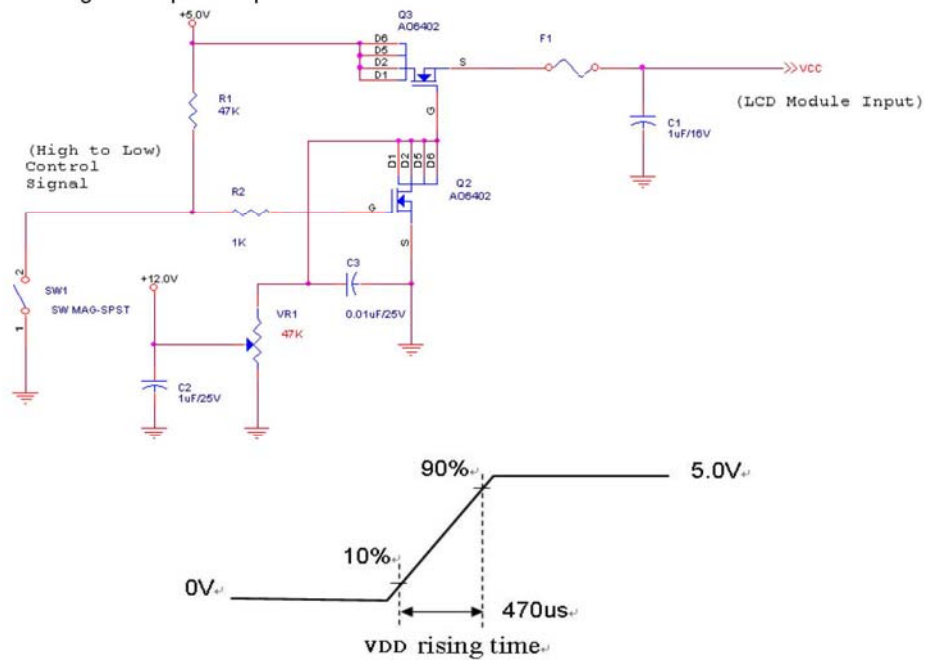


Signal Electrical Characteristics

(1) DC Characteristics of each signal are as following:

Symbol	Description	Min	Typ	Max	Units	Conditions
V_{TH}	Differential Input High Threshold	-	-	+100	[mV]	$V_{CM} = 1.2V$ Note 1
V_{TL}	Differential Input Low Threshold	-100	-	-	[mV]	$V_{CM} = 1.2V$ Note 1
$ V_{ID} $	Input Differential Voltage	100	-	600	[mV]	Note 1
V_{CM}	Differential Input Common Mode Voltage	+1.0	+1.2	+1.5	[V]	$V_{TH}-V_{TL} = 200MV$ (max) Note 1


Note 1: LVDS Signal Waveform

Single-End

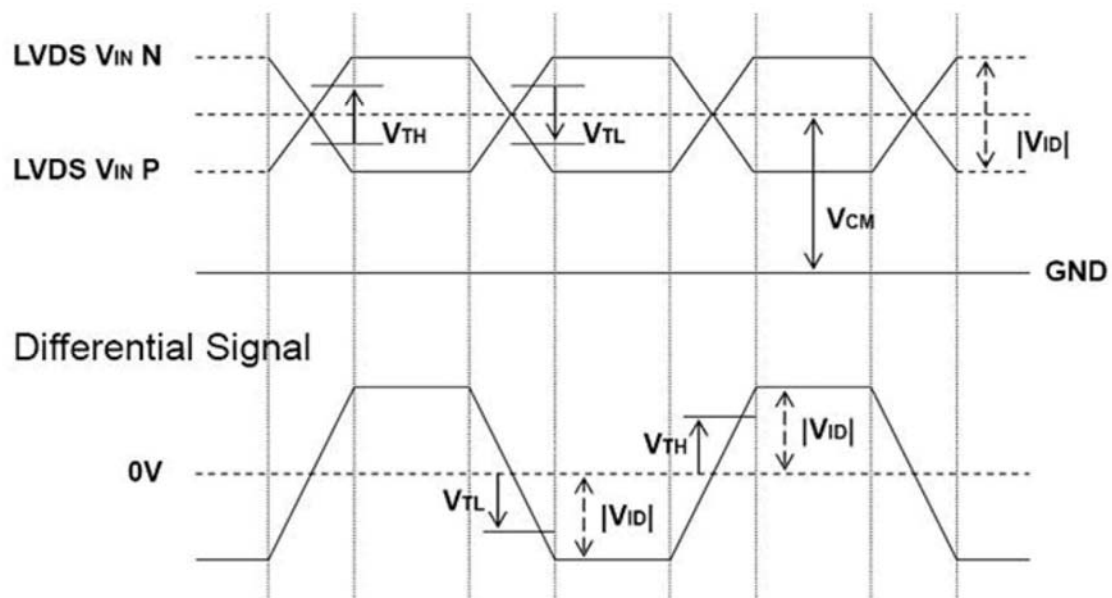

(2) AC Characteristics

Symbol	Description	Min	Max	Units	Conditions
F_{DEV}	Maximum deviation of input clock frequency during SSC	-	± 3	%	
F_{MOD}	Maximum modulation frequency of input clock during SSC	-	200	KHz	

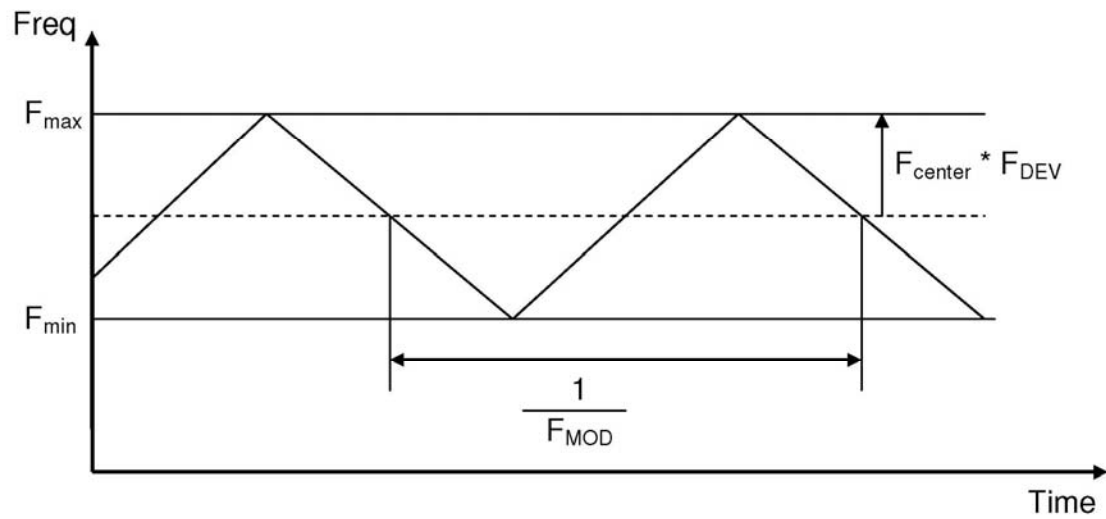


< Spread Spectrum >

3.0 SIGNAL Characteristic


Signal Characteristics

Pixel Format Definition

Following figure shows the relationship between the input signals and LCD pixel format.

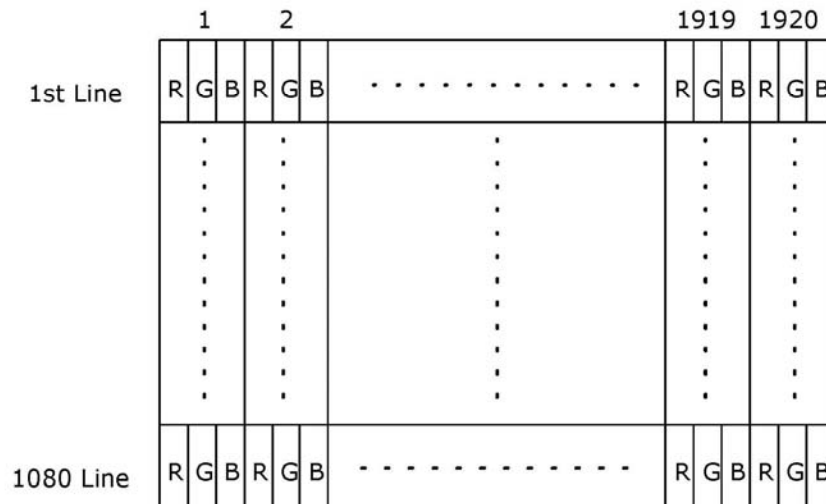

Input Data Format Definition

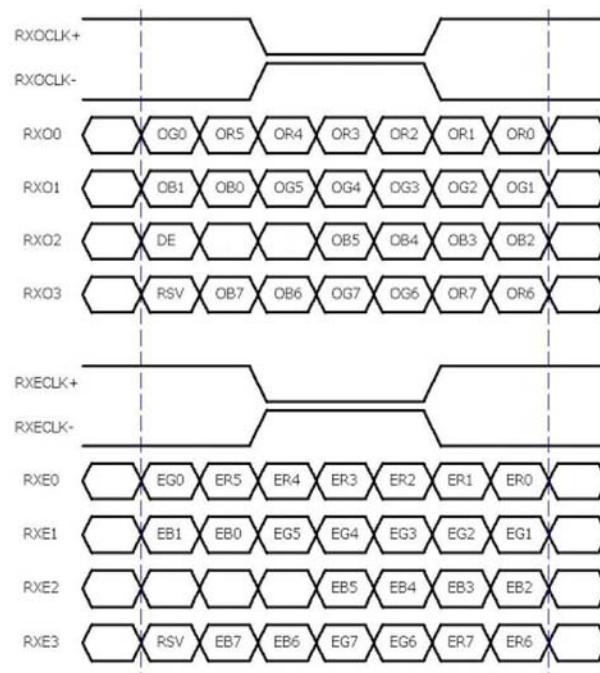


Note 1: R/G/B data 7:MSB, R/G/B data 0:LSB O = "Odd Pixel Data" E = "Even Pixel Data"

Signal Description

PIN #	SIGNAL NAME	DESCRIPTION
1	RxOIN0-	Negative LVDS differential data input (Odd data)
2	RxOIN0+	Positive LVDS differential data input (Odd data)
3	RxOIN1-	Negative LVDS differential data input (Odd data)
4	RxOIN1+	Positive LVDS differential data input (Odd data)
5	RxOIN2-	Negative LVDS differential data input (Odd data, DSPTMG)
6	RxOIN2+	Positive LVDS differential data input (Odd data, DSPTMG)
7	GND	Power Ground
8	RxOCLK-	Negative LVDS differential clock input (Odd clock)
9	RxOCLK+	Positive LVDS differential clock input (Odd clock)
10	RxOIN3-	Negative LVDS differential data input (Odd data)
11	RxOIN3+	Positive LVDS differential data input (Odd data)
12	RxEIN0-	Negative LVDS differential data input (Even data)
13	RxEIN0+	LVDS differential data input (Even data)
14	GND	Power Ground
15	RxEIN1-	Negative LVDS differential data input (Even data)
16	RxEIN1+	Positive LVDS differential data input (Even data)
17	GND	Power Ground
18	RxEIN2-	Negative LVDS differential data input (Even data)
19	RxEIN2+	Positive LVDS differential data input (Even data)
20	RxECLK-	Negative LVDS differential clock input (Even clock)
21	RxECLK+	Positive LVDS differential clock input (Even clock)
22	RxEIN3-	Negative LVDS differential data input (Even data)
23	RxEIN3+	Positive LVDS differential data input (Even data)
24	GND	Power Ground
25	Aging & HVS	NC (for AUO test only. Do not connect.)
26	SCL VCOM	NC (for AUO test only. Do not connect.)
27	SDA VCOM	NC (for AUO test only. Do not connect.)
28	VDD	Power +5V
29	VDD	Power +5V
30	VDD	Power +5V

Note 1: Input signals of odd and even clock shall be the same timing.

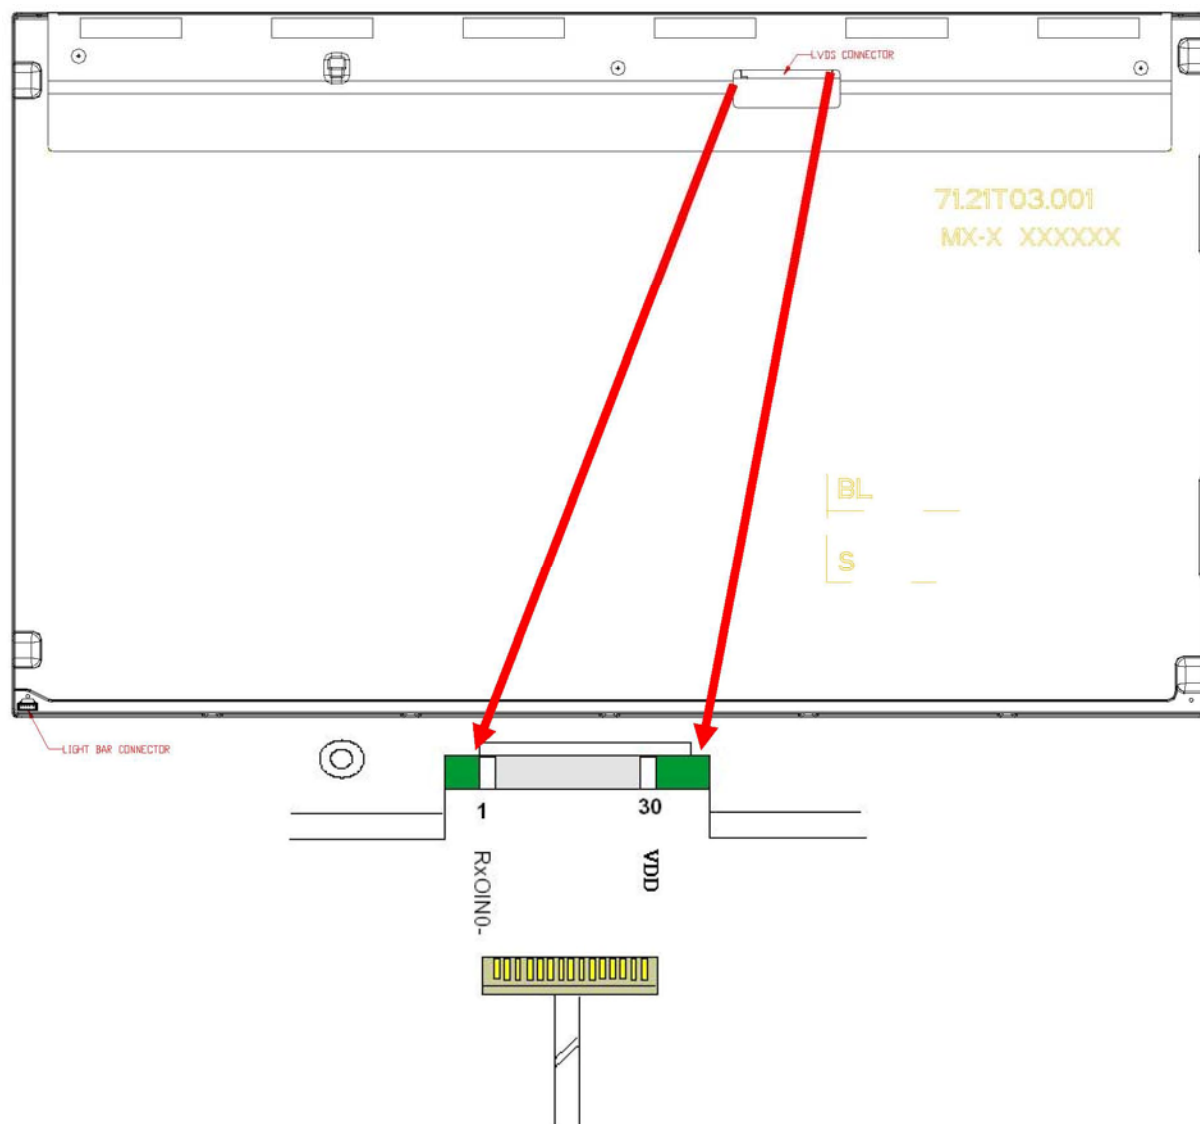

4.0 TIMING Characteristics



Timing Characteristics

The input signal timing specifications are shown as the following table

Signal	Item	Symbol	Min	Typ	Max	Unit
Vertical Section	Period	T_v	1088	1130	2047	Th
	Active	$T_{disp}(v)$	1080	1080	1080	Th
	Blanking	$T_{bp}(v)+T_{fp}(v)+PW_{vs}$	8	50	967	Th
Horizontal Section	Period	T_h	1004	1050	2047	Tclk
	Active	$T_{disp}(h)$	960	960	960	Tclk
	Blanking	$T_{bp}(h)+T_{fp}(h)+PW_{hs}$	44	90	1087	Tclk
Clock	Period	T_{clk}	25	13.89	11.11	ns
	Frequency	Freq	40	72	90	MHz
Frame rate	Frame rate	F	50	60	75	Hz


Note 1: DE mode only

Timing Diagram

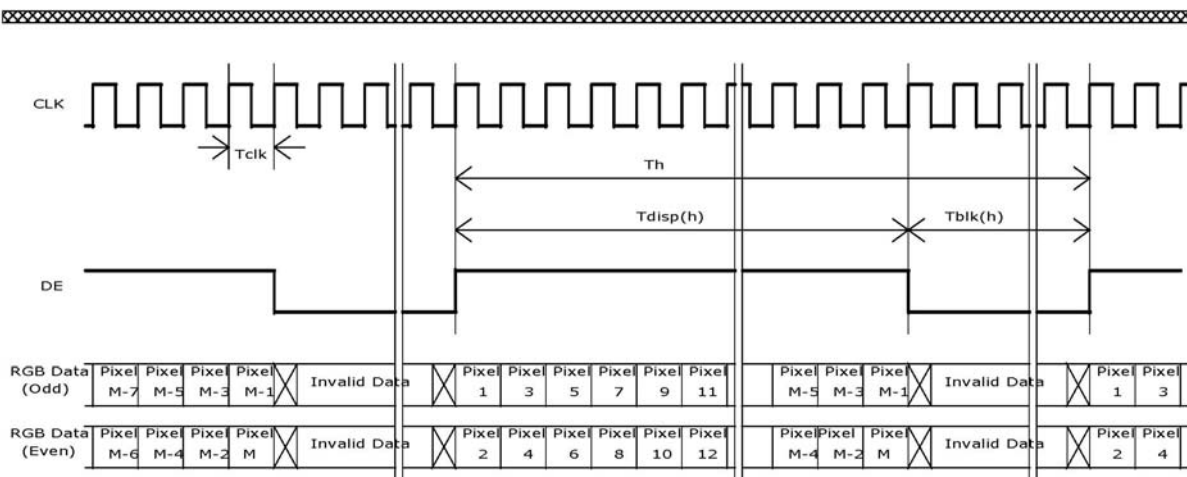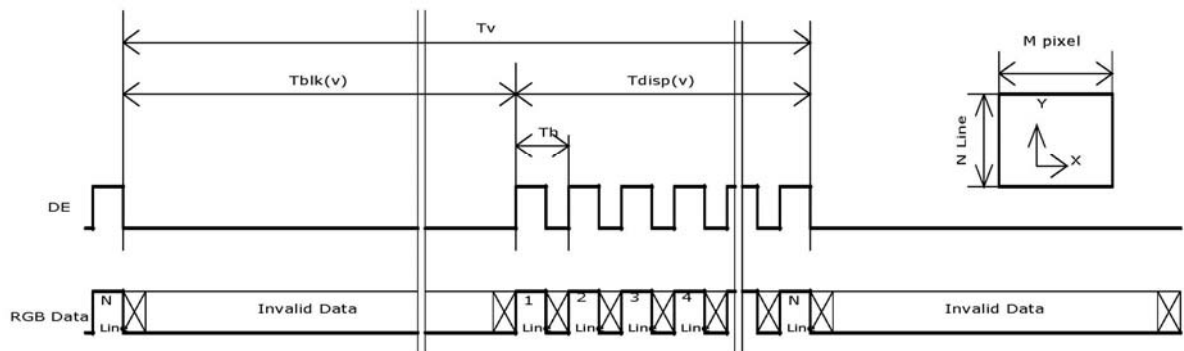

Power ON/OFF Sequence

VDD power and lamp on/off sequence are as follows. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state when VDD is off.

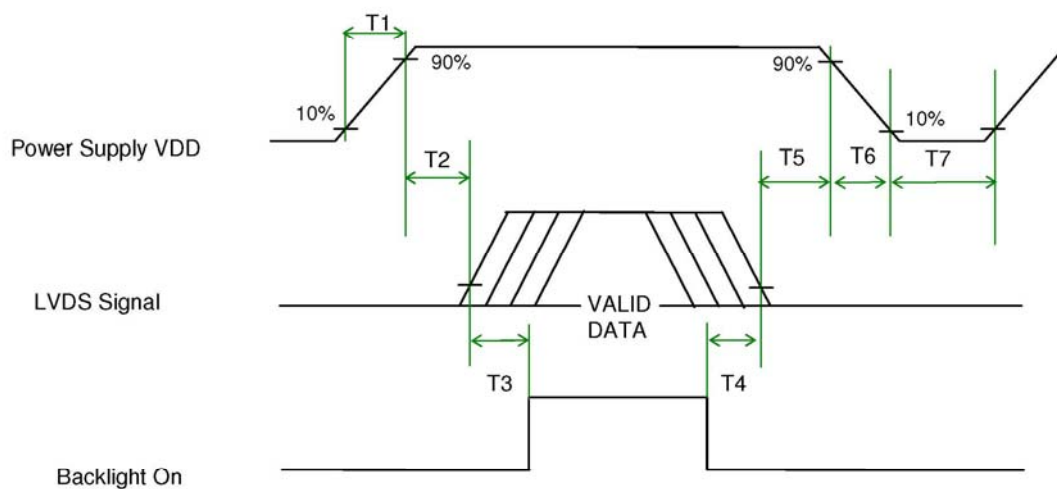

Power Sequence Timing

Parameter	Value			Unit
	Min.	Typ.	Max.	
T1	0.5	-	10	[ms]
T2	0	-	50	[ms]
T3	500	-	-	[ms]
T4	100	-	-	[ms]
T5	0	-	50	[ms] Note1,2
T6	5	-	100	[ms] Note1,2
T7	1000	-	-	[ms]

Note1 : Recommend setting T5 = 0ms to avoid electronic noise when VDD is off.

Note2 : During T5 and T6 period , please keep the level of input LVDS signals with Hi-Z state.

5.0 CONNECTOR and PIN ASSIGNMENT

Connector and Pin Assignment

Physical interface is described as for the connector on module. These connectors are capable of accommodating the following signals and will be following components.

TFT LCD Module

Connector Name / Designation	Interface Connector / Interface Card
Manufacturer	SIN SHENG P-TWO
Type Part Number	MSCKT2407P30HB AL230F-A0G1D-P
Mating Housing Part Number	TBD

Pin Assignment


Pin#	Signal Name	Pin#	Signal Name
1	RxOIN0-	2	RxOIN0+
3	RxOIN1-	4	RxOIN1+
5	RxOIN2-	6	RxOIN2+
7	GND	8	RxOCLKIN-
9	RxOCLKIN+	10	RxOIN3-
11	RxOIN3+	12	RxEIN0-
13	RxEIN0+	14	GND
15	RxEIN1-	16	RxEIN1+
17	GND	18	RxEIN2-
19	RxEIN2+	20	RxECLKIN-
21	RxECLKIN+	22	RxEIN3-
23	RxEIN3+	24	GND
25	NC (for AUO test only. Do not connect)	26	NC (for AUO test only. Do not connect)
27	NC (for AUO test only. Do not connect)	28	VDD
29	VDD	30	VDD

6.0 OPTICAL SPECIFICATION


Item		Symbol	Condition	Data	Unit	Note
Color chromaticity	Red	Rx	$\theta x=0$ $\theta y=0$ BM-7	0.6526	-	Test Mode : (1) (2) (3)
		Ry		0.3311	-	
	Green	Gx		0.2893	-	
		Gy		0.6430	-	
	Blue	Bx		0.1443	-	
		By		0.0494	-	
	White	Wx		0.2855	-	
		Wy		0.3212	-	
	Center Luminance of White			Lc	1200	
Uniform		Lu	80	%		
Contrast Ratio		CR	$\theta x=0$	3000:1	-	Test Mode : (1) (4)
Color Saturation		NTSC	$\theta y=0$ Klein K-10	85	%	
Viewing Angle	Horizontal	$\theta x+$	$CR \geq 10$	89	Deg	Test Mode : (1) (3)
		$\theta x-$		89		
	Vertical	$\theta y+$		89		
		$\theta y-$		89		

Test Mode :

(1) Definition of Viewing Angle (θx , θy) :

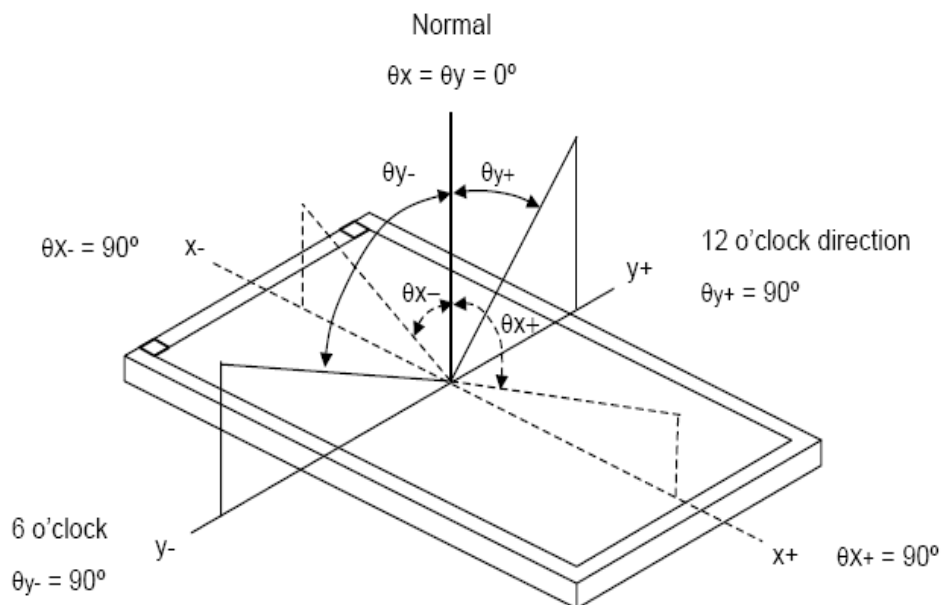


(2) Definition of Test Point :

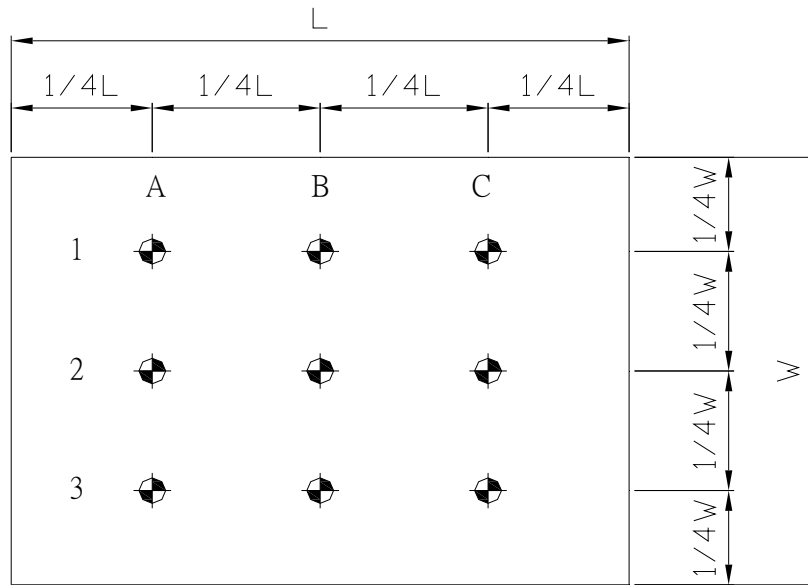


Active Area

(3) BM-7 Measurement Setup:

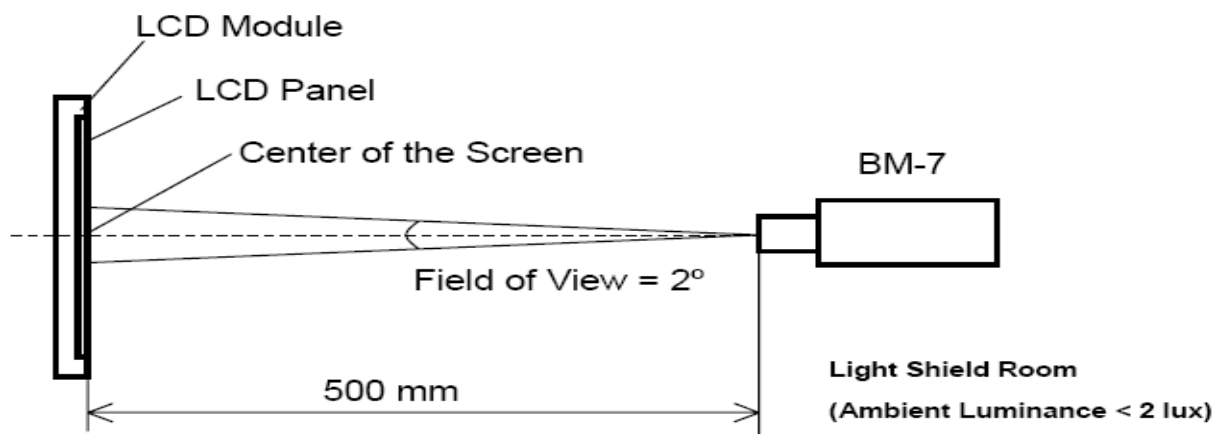

(4) Klein K-10 Measurement Setup:

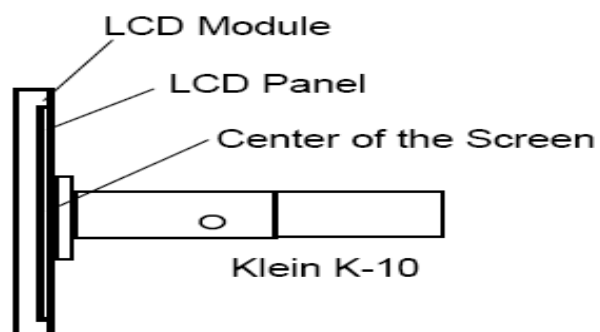

7.0 LED DRIVING BOARD SPECIFICATIONS

1. LED Application

This specification is applied to LED converter unit for DLF/DLH2126 (1200 nits) LED backlight

2. Operating Characteristics

Item	Symbol	Conditions	MIN.	TYP.	MAX.	Unit	Remark
Input Voltage	Vin		10.0	12.0	14.0	V	
Input Current (Low Brightness)	IinL	VIN=12V,Vadj=5V	0.0	-----	-----	mA	
Input Current (High Brightness)	IinH	VIN=12V,Vadj=0V	4.53	3.67	3.11	A	
LED Current (Low Brightness)	IoutL	VIN=12V,Vadj=5V	0.0	-----	-----	Arms	
LED Current (High Brightness)	IoutH	VIN=12V,Vadj=0V	1.6	1.62	1.65	A	
Working Frequency	Freq	VIN=12V,Vadj=0V	210	230	250	KHZ	
Brightness Control	Vadj	Connection of Voltage	0.2	-----	4.8	V	Vadj±5%
ON/OFF Control	Von	Normal Operation	2	-----	5	V	
	Voff	Normal Operation	0	-----	1.8	V	
Output Voltage	Vout	VIN=12V,Vadj=0V	24.79	24.81	24.85	V	
Efficiency	η	VIN=12V,Vadj=0V	87.5	91.6	94.1	%	

Note 1:Efficiency= $[(I_{outH} * V_{out}) / (I_{inH} * V_{in})] * 100\%$,Tolerance $\pm 0.5\%$

3. Connector Socket

3-1. Input Connector: J1(JST S8B-PH-SM3-TB or Compatible)

PIN No	Symbol	Description
1	Vin	DC+12V
2	Vin	DC+12V
3	Vin	DC+12V
4	GND	Ground
5	GND	Ground
6	GND	Ground
7	Brightness	Brightness Control 4.8V~0.2V
8	Control	ON/OFF Control 0~0.8V(OFF) 2~5V(ON)

3-2 . Output Connector: J2,J3 (JST S2B-EH or Compatible)

PIN NO	Symbol	Description
1	Output	LED High Voltage(+)
2	Output	LED Low Voltage (-)

4. Mechanical Characteristics
 Dimension: 124mm*50mm*15mm

INPUT CONNECTOR

J1:

PIN1:VIN

PIN2:VIN

PIN3:VIN


PIN4:GND

PIN5:GND

PIN6:GND

PIN7:BRIGHTNESS

PIN8:ON/OFF

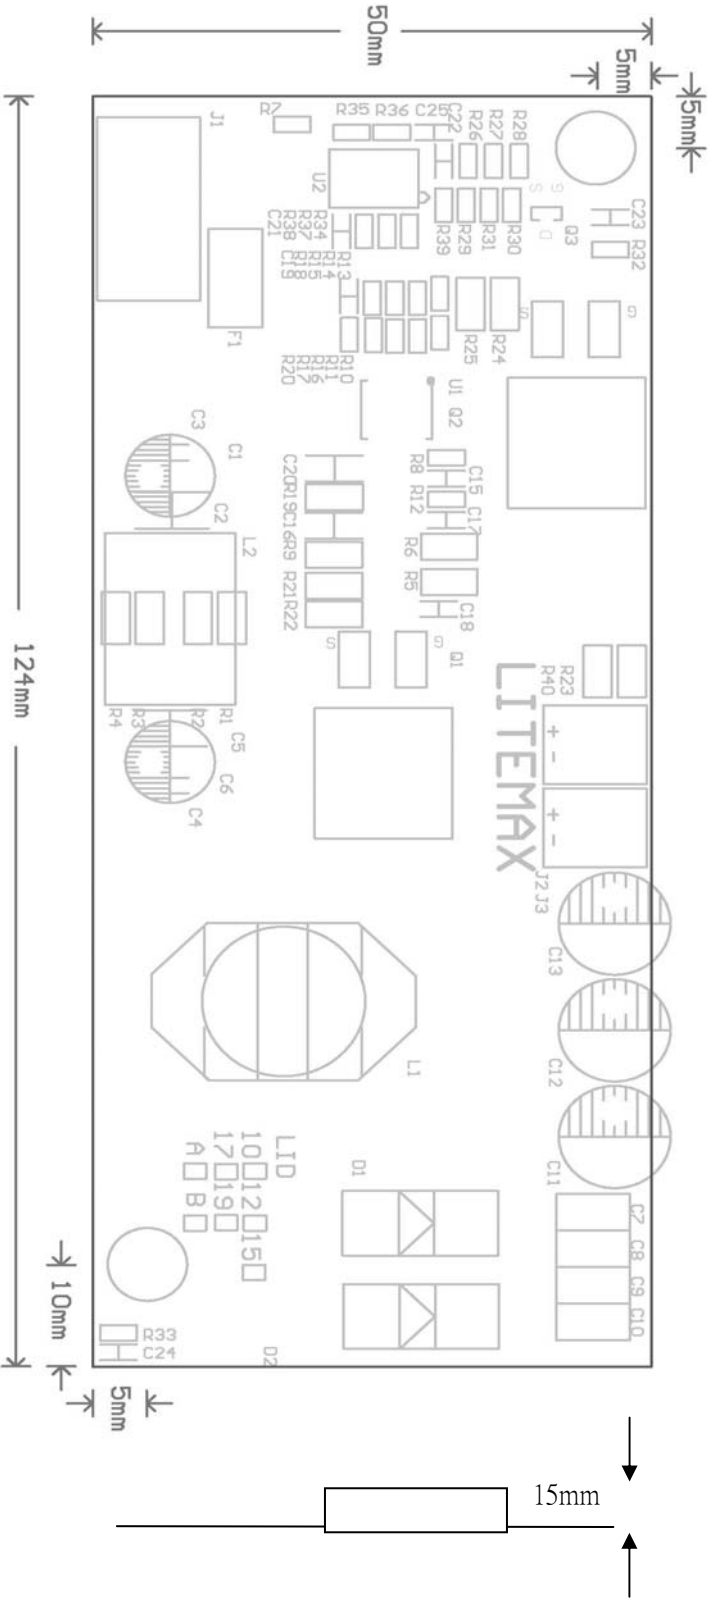

9.0 AD2662GDVAR SPECIFICATIONS(DLH2126 only)


We developed this A/D board to support industrial high brightness and commercial applications. This A/D board has many functions. It has an external luminance sensor as an option, an optional VR button to control brightness, fan rotation and RS232. Rev.1 is European RoHS compliant.

9.1 General Description

- Max Resolution Up To WUXGA
- Analog RGB Input up to 205MHz
- ULTRA-RELIABLE DVI INPUT
- Dual/single LVDS interface
- Support Panel DC5V or 3.3V, 12V Output
- External Fan Control by Software
- OSD Control
- Inverter Analog or PWM Dimming Control
- *External V.R. brightness control (optional)
- *External light sensor brightness control (optional)
- *External RS232 control (optional)
- Input Power 12V DC
- CBVS, S-VIDEO, **YCbCr (optional) INPUT
- Audio in and b2Wx2 Audio Out(optional)
- IR Remove control

9.2 Outline Dimensions

AD2662 150mmX100mmX20mm

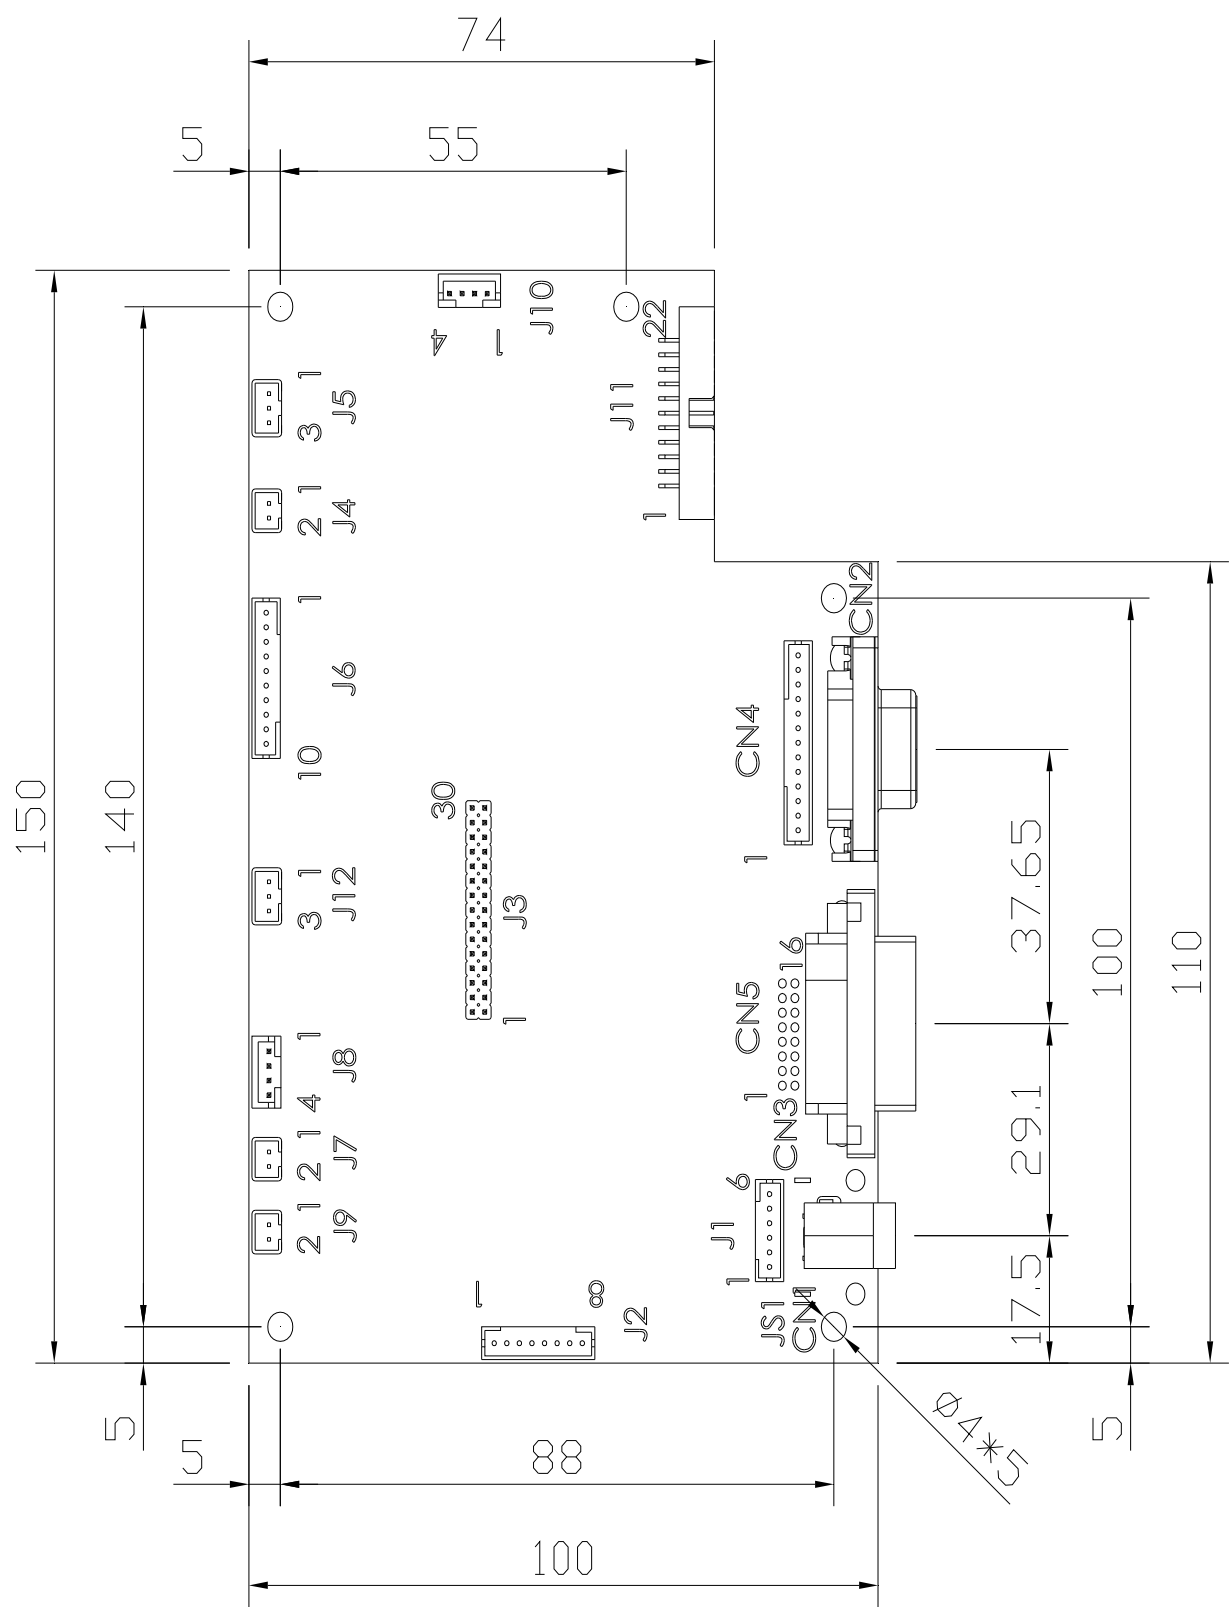

Technical drawing of a PCB layout showing dimensions and component labels. The drawing includes a top view with dimensions in millimeters (mm) and a side view showing component heights.

Dimensions (mm):


- Overall width: 160
- Overall height: 150
- Distance from top edge to component J1: 5
- Distance from top edge to component J2: 12.5
- Distance from top edge to component J3: 18.4
- Distance from top edge to component J4: 80
- Distance from top edge to component J5: 150
- Distance from top edge to component J6: 150
- Distance from top edge to component J7: 160
- Distance from left edge to component J1: 15.5
- Distance from left edge to component J2: 15
- Distance from left edge to component J3: 15
- Distance from left edge to component J4: 20
- Distance from left edge to component J5: 20
- Distance from left edge to component J6: 29
- Distance from left edge to component J7: 29.5

Component Labels:

- J1, J2, J3, J4, J5, J6, J7
- CN1
- U1
- U2
- U3
- U4
- U5
- U6
- U7
- U8
- U9
- U10
- U11
- U12
- U13
- U14
- U15
- U16
- U17
- U18
- U19
- U20
- U21
- U22
- U23
- U24
- U25
- U26
- U27
- U28
- U29
- U30
- U31
- U32
- U33
- U34
- U35
- U36
- U37
- U38
- U39
- U40
- U41
- U42
- U43
- U44
- U45
- U46
- U47
- U48
- U49
- U50
- U51
- U52
- U53
- U54
- U55
- U56
- U57
- U58
- U59
- U60
- U61
- U62
- U63
- U64
- U65
- U66
- U67
- U68
- U69
- U70
- U71
- U72
- U73
- U74
- U75
- U76
- U77
- U78
- U79
- U80
- U81
- U82
- U83
- U84
- U85
- U86
- U87
- U88
- U89
- U90
- U91
- U92
- U93
- U94
- U95
- U96
- U97
- U98
- U99
- U100

Notes:

- Ø3.2*3 (hole diameter and length)
- 1 (hole diameter)
- 2 (hole diameter)
- 5 (hole diameter)
- 10 (hole diameter)
- 15 (hole diameter)
- 20 (hole diameter)
- 25 (hole diameter)
- 30 (hole diameter)
- 35 (hole diameter)
- 40 (hole diameter)
- 45 (hole diameter)
- 50 (hole diameter)
- 55 (hole diameter)
- 60 (hole diameter)
- 65 (hole diameter)
- 70 (hole diameter)
- 75 (hole diameter)
- 80 (hole diameter)
- 85 (hole diameter)
- 90 (hole diameter)
- 95 (hole diameter)
- 100 (hole diameter)
- 105 (hole diameter)
- 110 (hole diameter)
- 115 (hole diameter)
- 120 (hole diameter)
- 125 (hole diameter)
- 130 (hole diameter)
- 135 (hole diameter)
- 140 (hole diameter)
- 145 (hole diameter)
- 150 (hole diameter)
- 155 (hole diameter)
- 160 (hole diameter)
- 165 (hole diameter)
- 170 (hole diameter)
- 175 (hole diameter)
- 180 (hole diameter)
- 185 (hole diameter)
- 190 (hole diameter)
- 195 (hole diameter)
- 200 (hole diameter)
- 205 (hole diameter)
- 210 (hole diameter)
- 215 (hole diameter)
- 220 (hole diameter)
- 225 (hole diameter)
- 230 (hole diameter)
- 235 (hole diameter)
- 240 (hole diameter)
- 245 (hole diameter)
- 250 (hole diameter)
- 255 (hole diameter)
- 260 (hole diameter)
- 265 (hole diameter)
- 270 (hole diameter)
- 275 (hole diameter)
- 280 (hole diameter)
- 285 (hole diameter)
- 290 (hole diameter)
- 295 (hole diameter)
- 300 (hole diameter)
- 305 (hole diameter)
- 310 (hole diameter)
- 315 (hole diameter)
- 320 (hole diameter)
- 325 (hole diameter)
- 330 (hole diameter)
- 335 (hole diameter)
- 340 (hole diameter)
- 345 (hole diameter)
- 350 (hole diameter)
- 355 (hole diameter)
- 360 (hole diameter)
- 365 (hole diameter)
- 370 (hole diameter)
- 375 (hole diameter)
- 380 (hole diameter)
- 385 (hole diameter)
- 390 (hole diameter)
- 395 (hole diameter)
- 400 (hole diameter)
- 405 (hole diameter)
- 410 (hole diameter)
- 415 (hole diameter)
- 420 (hole diameter)
- 425 (hole diameter)
- 430 (hole diameter)
- 435 (hole diameter)
- 440 (hole diameter)
- 445 (hole diameter)
- 450 (hole diameter)
- 455 (hole diameter)
- 460 (hole diameter)
- 465 (hole diameter)
- 470 (hole diameter)
- 475 (hole diameter)
- 480 (hole diameter)
- 485 (hole diameter)
- 490 (hole diameter)
- 495 (hole diameter)
- 500 (hole diameter)
- 505 (hole diameter)
- 510 (hole diameter)
- 515 (hole diameter)
- 520 (hole diameter)
- 525 (hole diameter)
- 530 (hole diameter)
- 535 (hole diameter)
- 540 (hole diameter)
- 545 (hole diameter)
- 550 (hole diameter)
- 555 (hole diameter)
- 560 (hole diameter)
- 565 (hole diameter)
- 570 (hole diameter)
- 575 (hole diameter)
- 580 (hole diameter)
- 585 (hole diameter)
- 590 (hole diameter)
- 595 (hole diameter)
- 600 (hole diameter)
- 605 (hole diameter)
- 610 (hole diameter)
- 615 (hole diameter)
- 620 (hole diameter)
- 625 (hole diameter)
- 630 (hole diameter)
- 635 (hole diameter)
- 640 (hole diameter)
- 645 (hole diameter)
- 650 (hole diameter)
- 655 (hole diameter)
- 660 (hole diameter)
- 665 (hole diameter)
- 670 (hole diameter)
- 675 (hole diameter)
- 680 (hole diameter)
- 685 (hole diameter)
- 690 (hole diameter)
- 695 (hole diameter)
- 700 (hole diameter)
- 705 (hole diameter)
- 710 (hole diameter)
- 715 (hole diameter)
- 720 (hole diameter)
- 725 (hole diameter)
- 730 (hole diameter)
- 735 (hole diameter)
- 740 (hole diameter)
- 745 (hole diameter)
- 750 (hole diameter)
- 755 (hole diameter)
- 760 (hole diameter)
- 765 (hole diameter)
- 770 (hole diameter)
- 775 (hole diameter)
- 780 (hole diameter)
- 785 (hole diameter)
- 790 (hole diameter)
- 795 (hole diameter)
- 800 (hole diameter)
- 805 (hole diameter)
- 810 (hole diameter)
- 815 (hole diameter)
- 820 (hole diameter)
- 825 (hole diameter)
- 830 (hole diameter)
- 835 (hole diameter)
- 840 (hole diameter)
- 845 (hole diameter)
- 850 (hole diameter)
- 855 (hole diameter)
- 860 (hole diameter)
- 865 (hole diameter)
- 870 (hole diameter)
- 875 (hole diameter)
- 880 (hole diameter)
- 885 (hole diameter)
- 890 (hole diameter)
- 895 (hole diameter)
- 900 (hole diameter)
- 905 (hole diameter)
- 910 (hole diameter)
- 915 (hole diameter)
- 920 (hole diameter)
- 925 (hole diameter)
- 930 (hole diameter)
- 935 (hole diameter)
- 940 (hole diameter)
- 945 (hole diameter)
- 950 (hole diameter)
- 955 (hole diameter)
- 960 (hole diameter)
- 965 (hole diameter)
- 970 (hole diameter)
- 975 (hole diameter)
- 980 (hole diameter)
- 985 (hole diameter)
- 990 (hole diameter)
- 995 (hole diameter)
- 1000 (hole diameter)

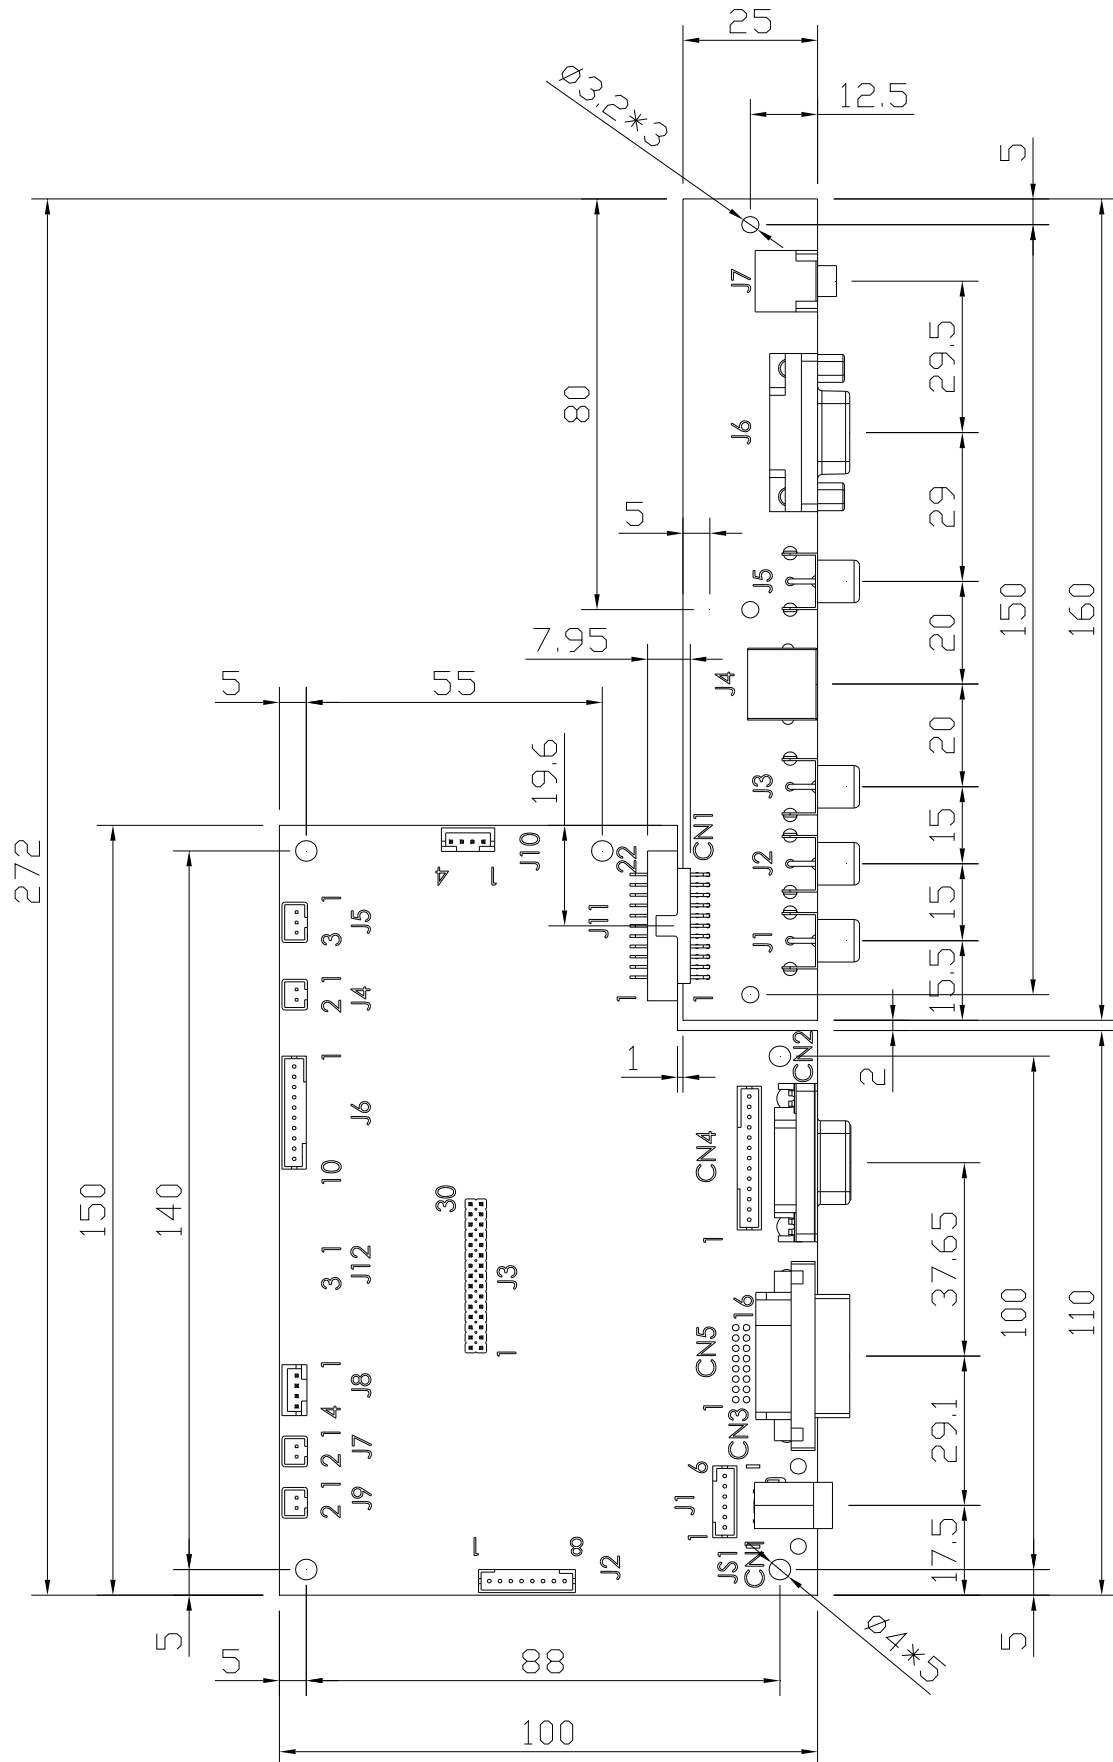

9.3 AD2662 Board Pin Define

J3: Panel connector

Pin No.	Function	Pin No.	Function
1	RxO0+	16	RxE1-
2	RxO0-	17	RxE2+
3	RxO1+	18	RxE2-
4	RxO1-	19	RxEC+
5	RxO2+	20	RxEC-
6	RxO2-	21	RxE3+
7	RxOC+	22	RxE3-
8	RxOC-	23	GND
9	RxO3+	24	GND
10	RxO3-	25	GND
11	GND	26	GND
12	GND	27	GND
13	RxE0+	28	PANEL-VCC
14	RxE0-	29	PANEL-VCC
15	RxE1+	30	PANEL-VCC

CN3: DVI-D INPUT Connector

Pin No.	Function	Pin No.	Function	Pin No.	Function
1	T.M.D.S. Data2-	9	T.M.D.S. Data1-	17	T.M.D.S. Data0-
2	T.M.D.S. Data2+	10	T.M.D.S. Data1+	18	T.M.D.S. Data0+
3	T.M.D.S. Data2/4 Shield	11	T.M.D.S. Data1/3 Shield	19	T.M.D.S. Data0/5 Shield
4	T.M.D.S. Data4-	12	T.M.D.S. Data3-	20	T.M.D.S. Data5-
5	T.M.D.S. Data4+	13	T.M.D.S. Data3+	21	T.M.D.S. Data5+
6	DDC Clock	14	+5V Power	22	T.M.D.S. Clock Shield
7	DDC Data	15	Ground (for +5V)	23	T.M.D.S. Clock+
8	Not Connected	16	Hot Plug Detect	24	T.M.D.S. Clock-

CN5: DVI-D Connector (16pin 2.0mm)

Pin No.	Function	Pin No.	Function	Pin No.	Function
1	RX2-	7	DDC_SDA	13	GND
2	RX2+	8	DDC_SCL	14	GND
3	RX1-	9	GND	15	DVI HP
4	RX1+	10	GND	16	DVI_5V
5	RX0-	11	RXC-		
6	RX0+	12	RXC+		

CN2: Analog RGB Input connector (D-SUB 15Pin)

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	RED	Analog Red	9	+5V	+5VDDC
2	GREEN	Analog Green	10	SGND	Sync GND
3	BLUE	Analog Blue	11	NCD	Reserved
4	GND	Reserved	12	SDA	DDC Serial Data
5	NC	VGA_CAB	13	HSYNC	Horizontal Sync
6	RED_RTN	Red Return	14	VSNC	Vertical Sync
7	GREEN_RTN	Green Return	15	SCL	DDC Data Clock
8	BLUE_RTN	Blue Return			

CN4: Analog RGB Input connector (13pin connector)

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	SCL	DDC Data Clock	8	BGND	Blue Return
2	SDA	DDC Serial Data	9	BLUE	Analog Blue
3	GND	Reserved	10	GGND	Green Return
4	+5V	+5VDDC	11	GREEN	Analog Green
5	GND	Reserved	12	RGND	Red Return
6	VSNC	Vertical Sync	13	RED	Analog Red
7	HSYNC	Horizontal Sync			

JS1: Power DIN(12V)

Pin No.	Function	Pin No.	Function
1	12VDC	2	12VDC
3	GND	4	GND

JS1: Power Jack (12V)

Pin No.	Function	Pin No.	Function
1	12VDC	2	12VDC

J1: Power connector (12V) (6PIN 2.0mm)

Pin No.	Function	Pin No.	Function
1	12VDC	4	GND
2	12VDC	5	GND
3	12VDC	6	GND

J8: Power connector (5V/12v)(4PIN 2.0mm)

Pin No.	Function	Pin No.	Function
1	5VDC	2	GND
3	12VDC	4	GND

J2: Inverter Connector(8PIN 2.0mm)

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	ON/OFF	Backlight ON/OFF	5	GND	GND
2	BRIGHT	Dimming adjust	6	12VDC	Input 12VDC
3	GND	GND	7	12VDC	Input 12VDC
4	GND	GND	8	12VDC	Input 12VDC

J7, J9: FAN (2PIN 2.0mm)

Pin No.	Function	Pin No.	Function
1	FAN(+)	2	GND

J6: Key Pad (9PIN 2.0mm)

Pin No.	Function	Pin No.	Function
1	POWER KEY	6	MENU KEY
2	GREEN LED	7	AUTO KEY
3	RED LED	8	GND
4	DOWN KEY	9	GND
5	UP KEY		

J10: Speaker Connector (4PIN 2.0mm)

Pin No.	Function	Pin No.	Function
1	SPK-R	2	GND
3	GND	4	SPK-L

J11 Extern Funtion Connector (11P X 2PIN 2.0mm)

Pin No.	Function	Pin No.	Function
1	Pb	2	Y
3	GND	4	Pr
5	GND	6	SY
7	GND	8	SC
9	GND	10	AV
11	GND	12	GND
13	TXD	14	RXD
15	GND	16	GND
17	GND	18	GND
19	Audio-L	20	Audio-R
21	GND	22	GND

J5: Ambient (3PIN 2.0mm)

Pin No.	Function	Pin No.	Function
1	3.3VDC	2	Sensor Out

J4: VR connector (3PIN 2.0mm)

Pin No.	Function	Pin No.	Function
1	3,3VDC	2	VR Out
3	GND		

J12: IR Connector(3PIN 2.0mm)

Pin No.	Function	Pin No.	Function
1	IR Out	3	3.3VDC
2	GND	4	

JP1: PANEL VCC (3PIN 2.54mm)

Pin No.	Function	Pin No.	Function
1-2	12V	5-6	3.3V
3-4	5V		

9.4 I/O BOARD Pin Define

J1:Component Y

Pin No.	Function	Pin No.	Function
1	Y	2	GND

J2:Component Cb

Pin No.	Function	Pin No.	Function
1	Cb	2	GND

J3:Component Cr

Pin No.	Function	Pin No.	Function
1	Cr	2	GND

J4:S-Video

Pin No.	Function	Pin No.	Function
1	GND	2	GND
3	Luminance	4	Chrominance

J5:Composite

Pin No.	Function	Pin No.	Function
1	Y	2	GND

J6:D-SUB9(RS232)

Pin No.	Function	Pin No.	Function
1	NC	2	TXD
3	RXD	4	NC
5	GND	6	NC
7	NC	8	NC
9	NC		

CN1:11P X 2 Connector

Pin No.	Function	Pin No.	Function
1	Component Cb	2	Component Y
3	GND	4	Component Cr
5	GND	6	S-Video Y
7	GND	8	S-Video C
9	GND	10	Composite
11	GND	12	GND
13	TXD	14	RXD
15	GND	16	GND
17	GND	18	GND
19	Audio IN(L)	20	Audio IN(R)

9.5 IR Receive Board Pin Define

J1: IR Connector

Pin No.	Function	Pin No.	Function
1	DATA OUT	2	GND
3	VCC	4	NC

9.6 DC Characteristics.


Power Consumption	10W	Note1
Operation Temperature	0~70	°C
Storage Temperature	-20~85	°C

Note: These values are for the A/D board body.

9.7 OSD menu

Here are some instructions for you to use the OSD (On Screen Display). By pressing the “menu”, you will see the below picture.

Timing shows resolution, H-frequency, and V-frequency of the panel. Version shows the firmware control version. This 2 information is not changeable by user.

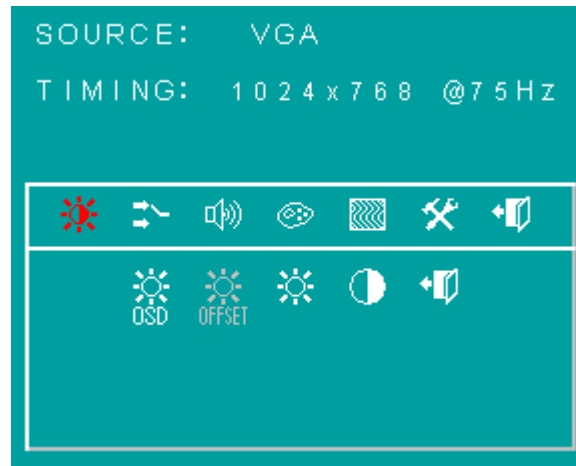

There are 7 sub pages inside the OSD manual, Brightness, Signal select, Sound, Color, Image, Tools, and Exit.

When you press “menu” button, you enter the “Brightness” sub page. You will see 5 selections:



press “menu”



press “menu”



press “menu”



OSD Brightness:



press “right” key



press “menu” once, you can go into adjust the brightness. Press “left” you can dim down the brightness to “0”, while press “right” you can increase the brightness to “100”.



Ambient light sensor: press this Icon, must to accompany with Litemax ambient light sensor to auto dimming.(OPTION)



Potentiometer: press this icon, adjust VR function.(OPTION)



Ambient light sensor with OSD offset: press this Icon




Press ‘menu’ once, you can adjust min. luminance to fit your application (OPTION)



Contrast: Press “menu” and “right” you can adjust the contrast from “0” to “100” by pressing the “left” and “right”.

Exit: You can exit this sub menu back to normal screen.

Sound :

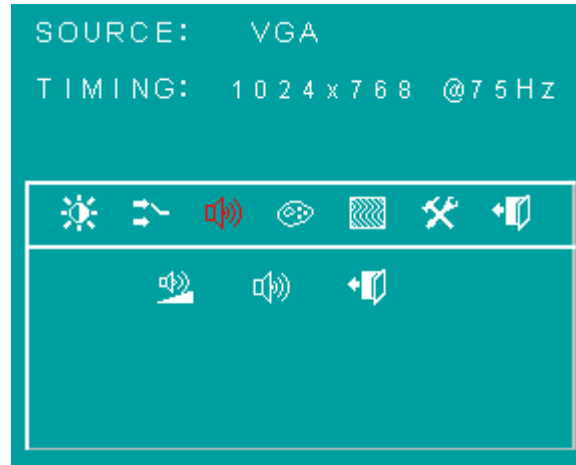

There are 3 options for “Sound” sub page.



Audio Volume: Audio volume adjustment.



Mute: You can mute the speaker by pressing this option.



Exit: back to the normal screen.



Auto Color: by press this “Auto Color” option, you can get the optimal color performance.



sRGB: Windows standard color setting.



Color Tempture: You can have 3 options in this selection.



Color Tempture User



Color Tempture_6500K



Color Tempture_9300K


“user mode”, “6500K” (Warm color scheme), “9300K (Cold color scheme).
Def ault is “user”, and inside all “R”, “G”, and “B” are set “100”



Exit: back to the normal screen.

Image :

Go into the “Image” page, you can see below picture.

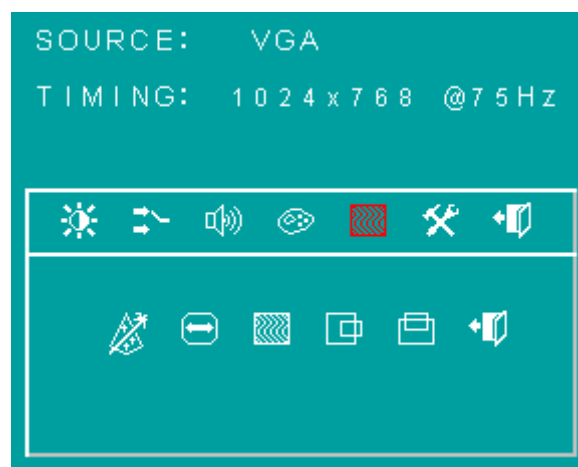



Auto just: Pressing this option, the AD2662 will adjust the optimal frequency of horizontal and vertical. You will see “Auto tune....” On the screen for around 3 seconds.



Clock: If you are not satisfied about the Autotune result, you can adjust manually by “Clock”.

The screen will be “wider” if you adjust this function.



Phase: If you see “double image” on characters, you can adjust “Phase” to make it perfect image.



HPos: You can shift the screen horizontally by this function.



Vpos: You can shift the screen vertically by this function.




Exit: Back to normal screen.

TOOLS :

On the “Tools” sub menu, you will see 4 icons.



Osd Control: Select this option, you will see 4 more options:

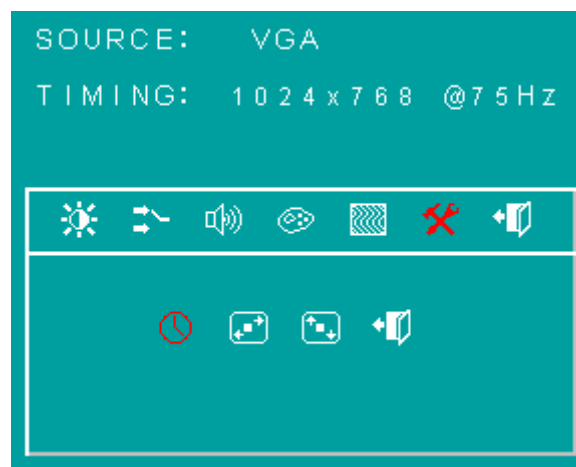



Osd_time: You can selection the time of OSD from 2 sec. to 16 sec.



Osd_HPos: You can move the OSD horizontally over the screen.



Osd_VPos: You can move the OSD Vertically over the screen.



Exit: back to main menu.



Factory_Reset: By pressing this, the screen will be back to the factory setting on very beginning and lost all the personal settings.



Sharpness: You can make the characters looks sharper.



Exit

BURNIN MODE :

Factory Burn-in mode: While your VGA cable is connected on the monitor, press “Menu” and Left and Right <” simultaneously, you will see “BURN IN MODE” on the center of the screen for 3 sec. Then unplug the VGA cable, the screen will show Red, Green, Blue, White, and Black in sequence automatically.


You can plug in the VGA signal cable, and re-plug the power connector to exit the burn-in mode.

KEY LOCK MODE :


OSD Lock Function: It is possible to lock all the OSD buttons to prevent unauthorized changes to occur by pressing “Menu” and “right >” buttons simultaneously. You will see the “lock” icon below on the center of the screen for 3 seconds. If any button is pushed after the lock function is initiated, the below icon will appear on the screen.'



To release the OSD lock, press “Menu” and “Right >”. The below icon will appear on the center of the screen for 3 seconds. Now all OSD keys are active again.

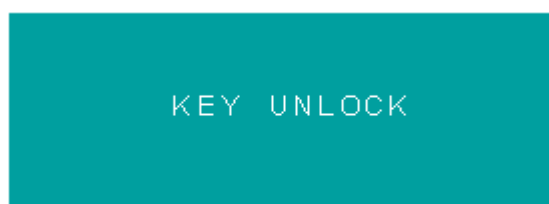

10.0 MECHANICAL DRAWING

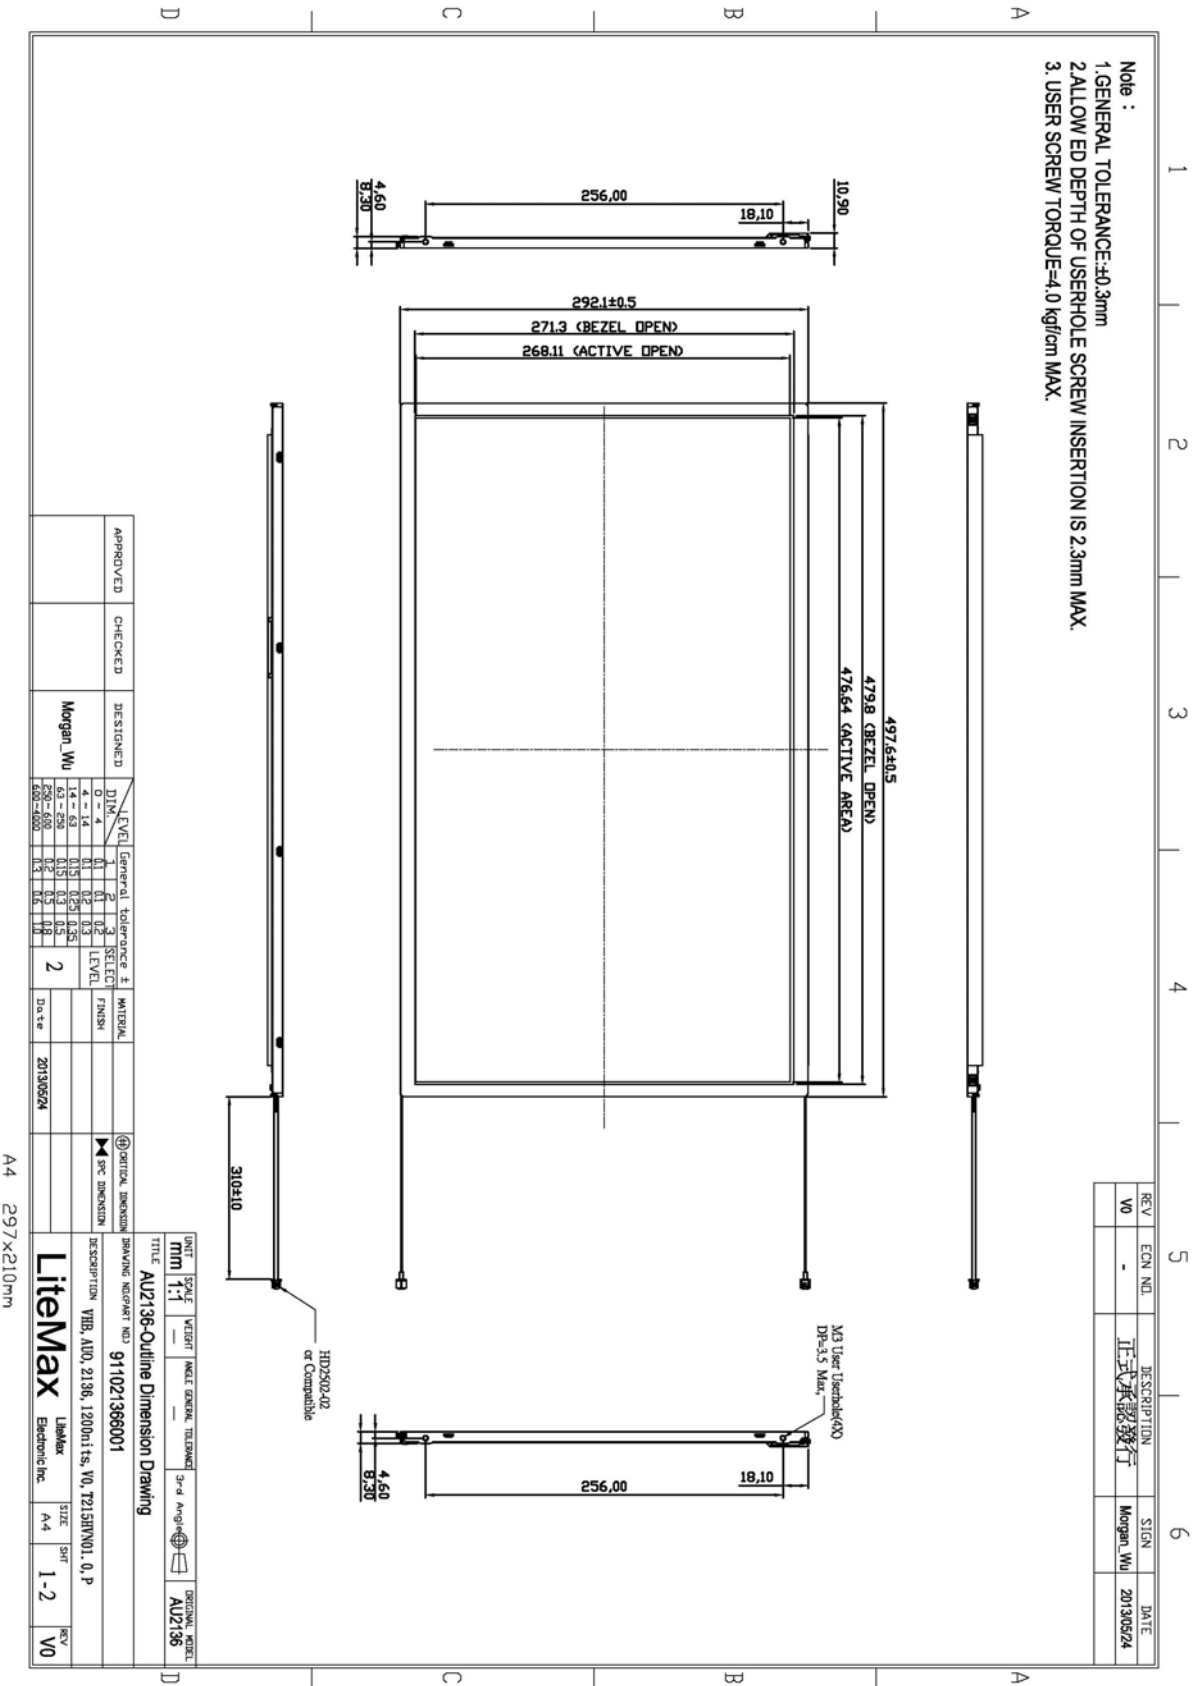

11.0 PRECAUTIONS

HANDLING PRECAUTIONS

- (1) The module should be assembled into the system firmly by using every mounting hole. Be careful not to twist or bend the module.
- (2) While assembling or installing modules, it can only be in the clean area. The dust and oil may cause electrical short or damage the polarizer.
- (3) Use fingerstalls or soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (4) Do not press or scratch the surface harder than a HB pencil lead on the panel because the polarizer is very soft and easily scratched.
- (5) If the surface of the polarizer is dirty, please clean it by some absorbent cotton or soft cloth. Do not use Ketone type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanently damage the polarizer due to chemical reaction.
- (6) Wipe off water droplets or oil immediately. Staining and discoloration may occur if they left on panel for a long time.
- (7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contacting with hands, legs or clothes, it must be washed away thoroughly with soap.
- (8) Protect the module from static electricity, it may cause damage to the C-MOS Gate Array IC.
- (9) Do not disassemble the module.
- (10) Do not pull or fold the lamp wire.
- (11) Pins of I/F connector should not be touched directly with bare hands.

STORAGE PRECAUTIONS

- (1) High temperature or humidity may reduce the performance of module. Please store LCD module within the specified storage conditions.
- (2) It is dangerous that moisture come into or contacted the LCD module, because the moisture may damage LCD module when it is operating.
- (3) It may reduce the display quality if the ambient temperature is lower than 10 °C. For example, the response time will become slowly, and the starting voltage of lamp will be higher than the room temperature.

OPERATION PRECAUTIONS

- (1) Do not pull the I/F connector in or out while the module is operating.
- (2) Always follow the correct power on/off sequence when LCD module is connecting and operating. This can prevent the CMOS LSI chips from damage during latch-up.